


Features

- : 850nm wavelength range
- : 25mW VCSEL
- : Multi_mode beam profile
- : High reliability
- : Other configurations available on request

Description




Applications

- : Consumer electronics
- : Safety sensor
- : Illumination light source
- : Gesture sensor light source

Absolute Maximum Ratings

Parameter	Rating
Storage Temperature	-40 to 85 °C
Operating Temperature	-10 to 70 °C
Continuous Forward Current	40mA

Dimensions

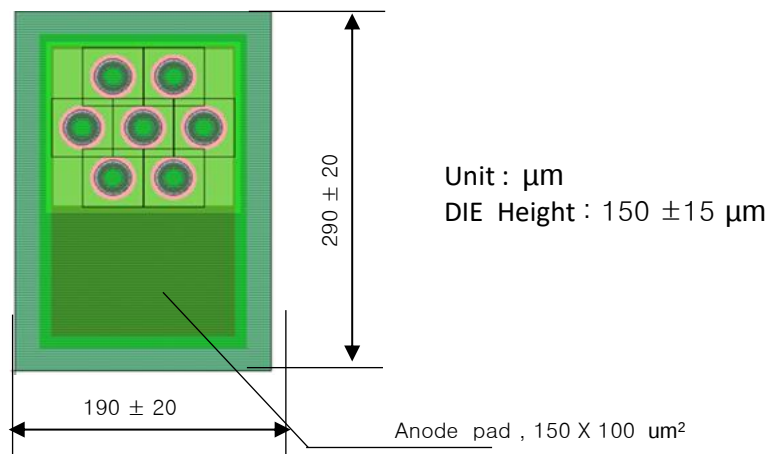




Electro-Optics Characteristics ($T_a=25^{\circ}\text{C}$ unless otherwise stated)

Parameters	Symbol	Specified			Unit	Test Conditions
		Min.	Typ.	Max.		
Threshold Current	I_{th}		7.0		mA	CW
I_{th} Temperature Variation	ΔI_{th}		3.0		mA	$T_a = -10$ to 70°C
Slope Efficiency	η		1.0		W/A	$I_f = 30$ mA
η Temperature Variation	$\Delta \eta / \Delta T$		-0.5		% / $^{\circ}\text{C}$	$T_a = -10$ to 70°C at 30mA
Optical Output Power	P_o		23		mW	$I_f = 30$ mA
Peak Wavelength	λ_p	840	850	860	nm	$I_f = 30$ mA
λ Temperature Variation	$\Delta \lambda / \Delta T$		0.06		nm / $^{\circ}\text{C}$	$T_a = -10$ to 70°C at 30mA
Spectral Bandwidth (RMS)	$\Delta \lambda$			0.85	nm	$I_f = 30$ mA
Beam Divergence	Θ		20		$^{\circ}$	$P_o = 25$ mW (FWHM)
Operating Voltage	V_f		1.9	2.3	V	$I_f = 30$ mA
Breakdown Voltage	V_b	-10			V	
Dynamic Resistance	R_d		10		Ohm	$I_f = 30$ mA

Notes

* These specifications are subject to change without notice.



NOTICE

The inherent design of this component causes it to be sensitive to electrostatic discharge(ESD). To prevent ESD-induced damage and/or degradation to equipment, take normal ESD precautions when handling this product


DANGER

The VCSEL is a class IIIB laser and should be treated as a potential eye hazard. Due to the size of the component, the applicable warning logotype, aperture label, and certification / identification label cannot be placed on the component itself.




Characteristics Curves

LIV Curve

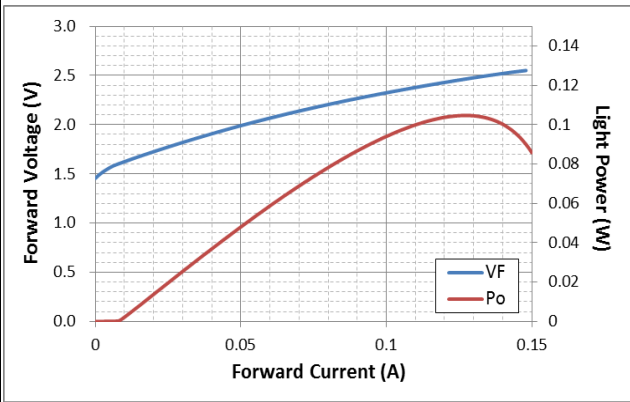

Test PKG sample : To-Can type, To-46
Test condition :
CW Mode : IF step interval 1.5mA, Delay time 2msec

Power conversion efficiency

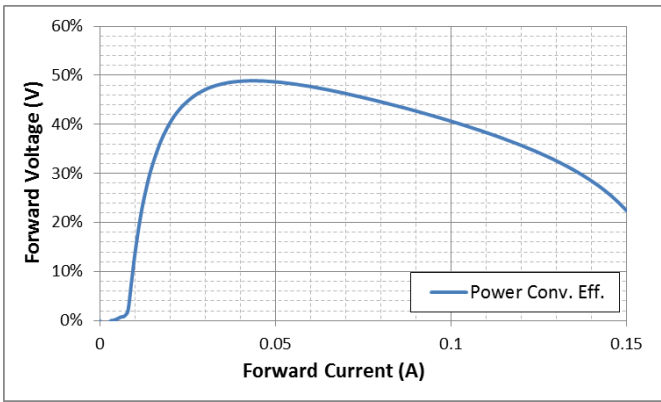

Test PKG sample : To-Can type, To-46
Test condition :
CW Mode : IF step interval 1.5mA, Delay time 2msec